

archlum
The right light for every space



OTTO
Minimal lights

APPLICATION VARIETY

Otto family covers a wide range of application area by offering an adjustable wall luminaire, a pendant luminaire and two downlights of different sizes.


In addition to this variety of luminaire types, it is also possible to have different color combinations and beam angles in each luminaire. Thanks to this flexibility, Otto can meet various architectural, lighting and ambience requirements in every kind of project.




DOWNLIGHTS - OTTO35 AND OTTO45

Otto family offers two downlights with minimalist design in different sizes, 35 mm and 45 mm cutout options. Thanks to the deep recessed LED, glare control and visual comfort are achieved at the same time.



The standard version of both downlights have aluminium housing with soft curved design, available in white and black. Deco versions can be produced with various color combinations and fitted to different project identities.

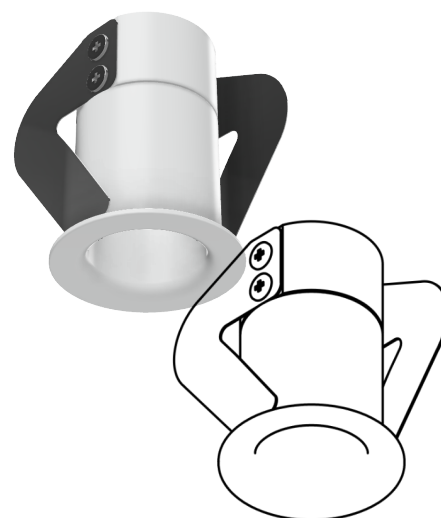

Example: Otto 35- Standard

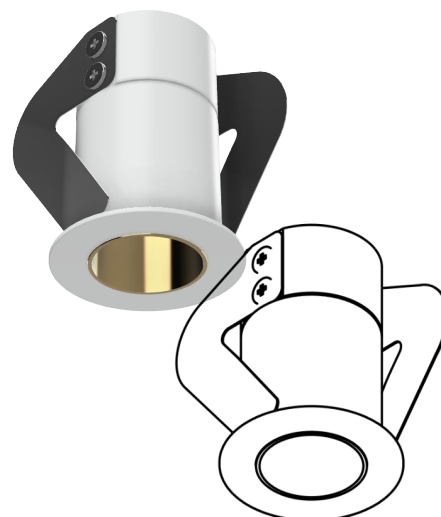

Example: Otto 35- Deco

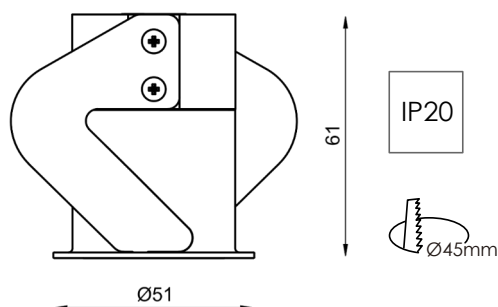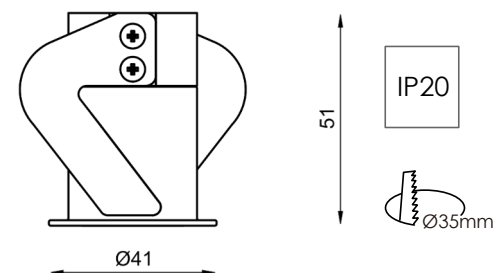

While small in height, Otto has side cable entrance, which reduces supply cable bending and additionally reduces installation hole depth.

Stainless steel spring is designed to provide universal and convenient installation.

Combined, those two elements allow Otto downlight to be installed in all types of ceilings and furniture.



Example: Otto 35- Standard



OTTO WALL

The head of Otto wall luminaire can be rotated, which allows each user to find the most comfortable angle for themselves.

Available in two alternatives; visible or hidden switch. The luminaire with visible switch enables user to turn on and off manually. In the hidden switch alternative the switch is placed just below the head of luminaire. Once head is closed it provides an automatic turning off function.

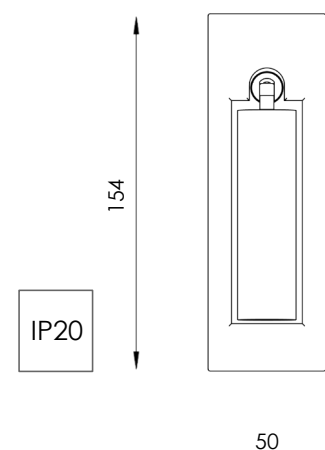
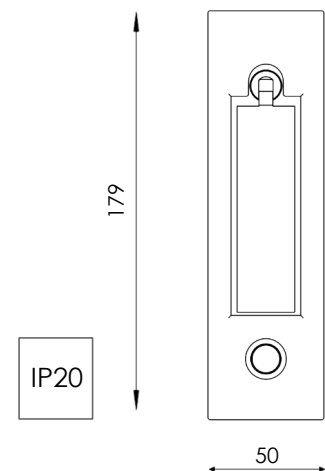


OTTO PENDANT

Otto pendant luminaire has a cylindrical tube made of aluminium.

Functional housing design with the LED driver inside allows minimalist size and easy installation.

Spot, narrow and medium beam angles are available for different installation heights and lighting applications.

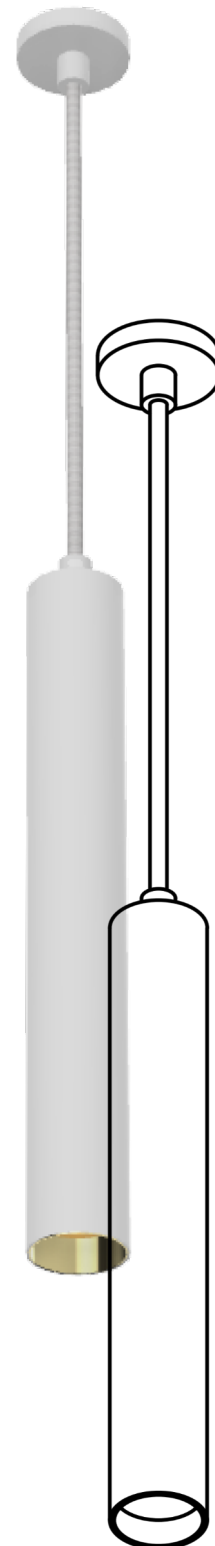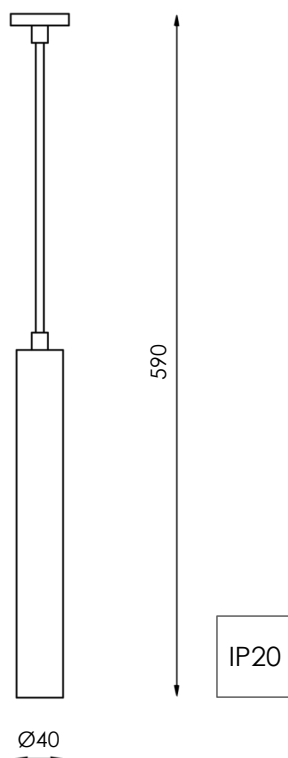

DESIGN VARIATION

Each luminaire in Otto family is available in two different housing colors as standard; white and black. All luminaires can be customised and installed with a different reflector or snoot color in accordance with the request. Therefore, Otto family provides the opportunity to adapt to any design identity, which is especially expected and important in hotel applications.

SURFACE FINISH:




REFLECTOR / SNOOT:






LIGHT CHARACTERISTIC

The high color rendering index (CRI) provides high quality in visual output. Each luminaire is available in three correlated color temperatures (CCT):



2700K



3000K



4000K

OTTO35



18° beam angle



30° beam angle

Catalogue ID	CCT	UGR	CRI	Beam	Light output	If (mA)	Power	Dimensions
ARCH-OTTO35-T-xx-18-927-2.5	2700	<16	90	18 °	110 lm	500	2.5 W	ø40.5x52
ARCH-OTTO35-T-xx-18-930-2.5	3000	<16	90	18 °	110 lm	500	2.5 W	ø40.5x52
ARCH-OTTO35-T-xx-18-940-2.5	4000	<16	90	18 °	120 lm	500	2.5 W	ø40.5x52
ARCH-OTTO35-T-xx-30-927-2.5	2700	<16	90	30 °	120 lm	500	2.5 W	ø40.5x52
ARCH-OTTO35-T-xx-30-930-2.5	3000	<16	90	30 °	120 lm	500	2.5 W	ø40.5x52
ARCH-OTTO35-T-xx-30-940-2.5	4000	<16	90	30 °	130 lm	500	2.5 W	ø40.5x52

OTTO45



30° beam angle

Catalogue ID	CCT	UGR	CRI	Beam	Light output	If (mA)	Power	Dimensions
ARCH-OTTO45-T-xx-30-927-8	2700	<16	90	30 °	410 lm	350	8 W	ø50.5x62
ARCH-OTTO45-T-xx-30-930-8	3000	<16	90	30 °	410 lm	350	8 W	ø50.5x62
ARCH-OTTO45-T-xx-30-940-8	4000	<16	90	30 °	460 lm	350	8 W	ø50.5x62

OTTO WALL



30° beam angle

Catalogue ID	CCT	UGR	CRI	Beam	Light output	If (mA)	Power	Dimensions
ARCH-OTTO-W-xx-30-927-3	2700	<16	90	30 °	140 lm	500	3 W	154x50
ARCH-OTTO-W-xx-30-930-3	3000	<16	90	30 °	140 lm	500	3 W	154x50
ARCH-OTTO-W-xx-30-940-3	4000	<16	90	30 °	150 lm	500	3 W	154x50
ARCH-OTTO-WS-xx-30-927-3	2700	<16	90	30 °	140 lm	500	3 W	179x50
ARCH-OTTO-WS-xx-30-930-3	3000	<16	90	30 °	140 lm	500	3 W	179x50
ARCH-OTTO-WS-xx-30-940-3	4000	<16	90	30 °	150 lm	500	3 W	179x50

** W: hidden switch, WS: visible switch

OTTO PENDANT



18° beam angle



24° beam angle



36° beam angle

Catalogue ID	CCT	UGR	CRI	Beam	Light output	If (mA)	Power	Dimensions
ARCH-OTTO-P-xx-18-927-11	2700	<16	90	18 °	510 lm	250	11 W	ø40x300
ARCH-OTTO-P-xx-18-930-11	3000	<16	90	18 °	530 lm	250	11 W	ø40x300
ARCH-OTTO-P-xx-18-940-11	4000	<16	90	18 °	600 lm	250	11 W	ø40x300
ARCH-OTTO-P-xx-24-927-11	2700	<16	90	24 °	510 lm	250	11 W	ø40x300
ARCH-OTTO-P-xx-24-930-11	3000	<16	90	24 °	530 lm	250	11 W	ø40x300
ARCH-OTTO-P-xx-24-940-11	4000	<16	90	24 °	600 lm	250	11 W	ø40x300
ARCH-OTTO-P-xx-36-927-11	2700	<16	90	36 °	510 lm	250	11 W	ø40x300
ARCH-OTTO-P-xx-36-930-11	3000	<16	90	36 °	530 lm	250	11 W	ø40x300
ARCH-OTTO-P-xx-36-940-11	4000	<16	90	36 °	600 lm	250	11 W	ø40x300

xx possibilities: **W** (white) ; **B** (black) ; **WB** (white-black reflector) ; **WG** (white-gold reflector) ; **BG** (black-gold reflector)

FULL RANGE OVERVIEW:

OTTO35



OTTO45



OTTO WALL



OTTO PENDANT



Standard luminaires:



White



Black

Standard luminaires:



White



Black



White mask
with visible or
hidden switch



Black mask
with visible or
hidden switch

Deco luminaires:



White-gold reflector



Black-gold reflector

Deco luminaires:



White-gold reflector



Black-gold reflector

Deco luminaires:



White head-black snoot



Black head-gold snoot

Deco luminaires:



White-gold reflector



Black-gold reflector



White-black reflector



White-black reflector



Gold head-gold snoot



White-black reflector

archlum

The right light for every space

www.archlum.com