



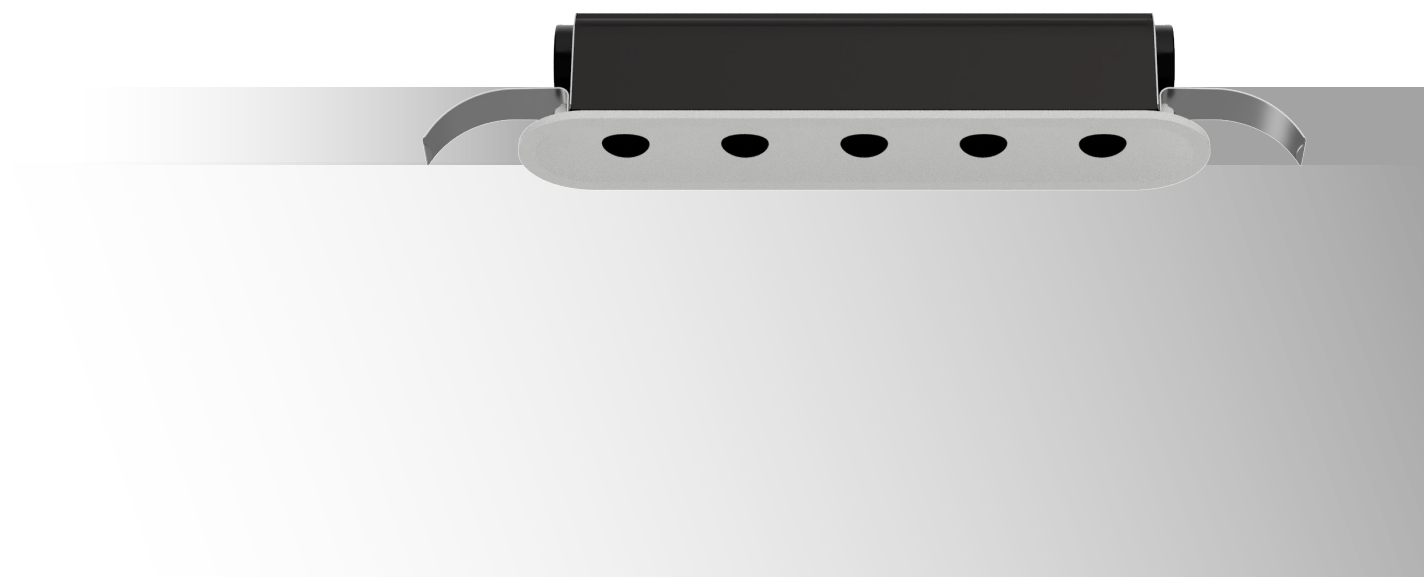

MINI L
Linear Downlight

MINI L

Archlum's MINI L luminaires are small minimalist downlights with 5 or 10 light points and with three different beam angles. With a width of only 30mm and aperture of Ø10mm, is ideal for application in small recesses as a concealed light source. The aluminium housing and optimised heat sink provide robustness and allows this small luminaire to reach a power of 28 W.

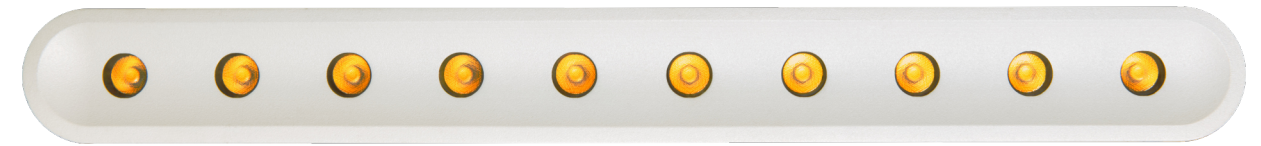

Optics

Micro-optic system of Archlum's MINI L delivers high performance in a small package. To mask the light source, a 10mm aperture and deep, dark snoot are used. Providing the best glare-reduction, absorbing any scattered light and shears at 40°.

Spot 15°



Medium 25°




Wide 35°



Light Characteristics

Archlum's MINI L luminaires enable a vast range of application possibilities by offering three different beam angles: 15°, 25°, and 35°. While the spot lens provides accent lighting, the wide beam can be used for general illumination and in situations where close-range lights are required.

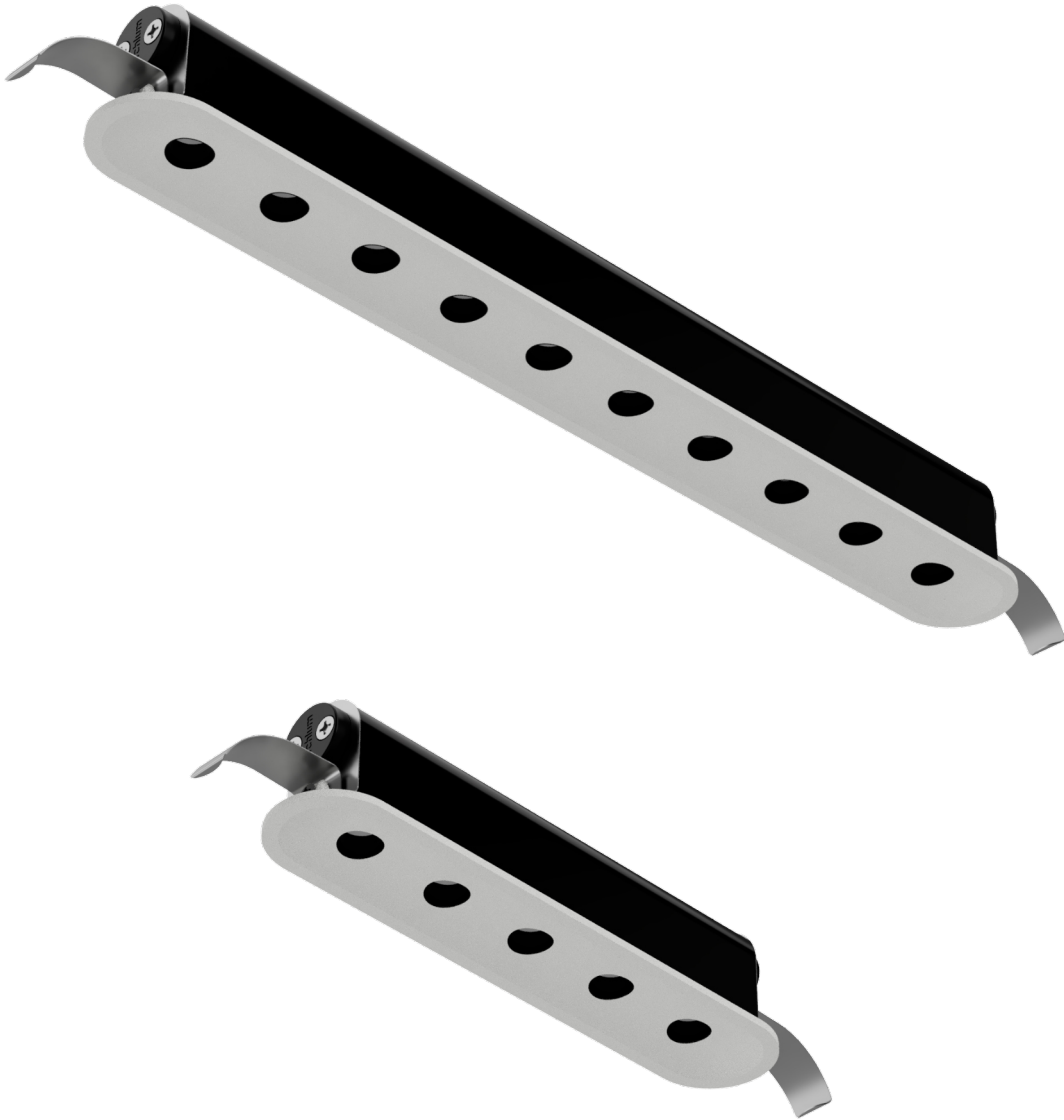


Application

The modern and minimalist appearance of MINI L, combined with the availability of 5 and 10 points alternative, fits into every architectural design concept. The high-quality optical lens provides maximum visual comfort and lighting control.

MINI 5

Colour Rendering Index
CRI >90

System Power
14 W

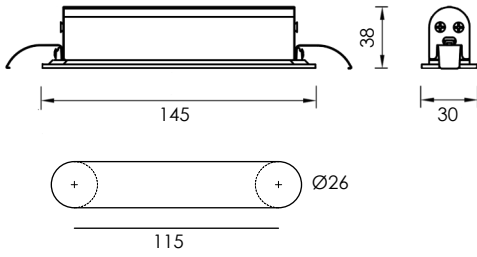

15° Beam



25° Beam




35° Beam

MINI 10

Colour Rendering Index
CRI >90

System Power
28 W

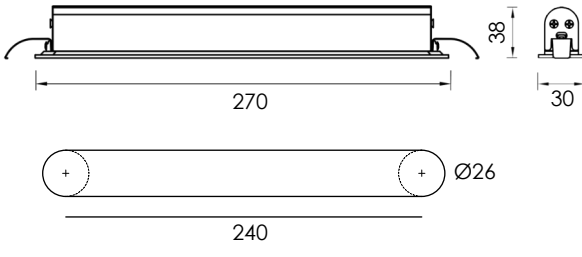

15° Beam



25° Beam



35° Beam



Catalogue ID	CCT	Beam	Light output	Power	IP level front	Dimensions
ARCH-MINI5-T-930-15-14	3000	15°	780 lm	14	IP40	30x145x38
ARCH-MINI5-T-930-25-14	3000	25°	780 lm	14	IP40	30x145x38
ARCH-MINI5-T-930-35-14	3000	35°	780 lm	14	IP40	30x145x38
ARCH-MINI5-T-940-15-14	4000	15°	850 lm	14	IP40	30x145x38
ARCH-MINI5-T-940-25-14	4000	25°	850 lm	14	IP40	30x145x38
ARCH-MINI5-T-940-35-14	4000	35°	850 lm	14	IP40	30x145x38



Catalogue ID	CCT	Beam	Light output	Power	IP level front	Dimensions
ARCH-MINI10-T-930-15-28	3000	15°	1560 lm	28	IP40	30x270x38
ARCH-MINI10-T-930-25-28	3000	25°	1560 lm	28	IP40	30x270x38
ARCH-MINI10-T-930-35-28	3000	35°	1560 lm	28	IP40	30x270x38
ARCH-MINI10-T-940-15-28	4000	15°	1700 lm	28	IP40	30x270x38
ARCH-MINI10-T-940-25-28	4000	25°	1700 lm	28	IP40	30x270x38
ARCH-MINI10-T-940-35-28	4000	35°	1700 lm	28	IP40	30x270x38

archlum

The right light for every space

www.archlum.com